




## GERFLUID - MONOFLEX

Light duty hose for delivery and discharge of liquids  
Food grade PVC wall and rigid PVC helix

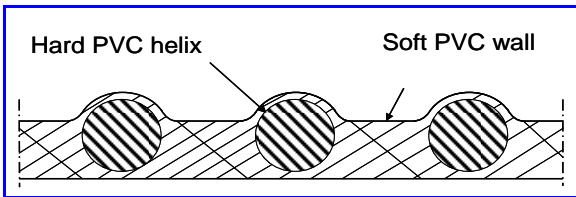

### Material :

Soft PVC wall food grade according to EU regulations  
rigid PVC helix

### Color :

Clear  
White helix

### Printing :

MONOFLEX ΞΨ 10/2011  
MADE IN FRANCE

### Temperature resistance:

0°C / + 60°C

### Applications :

Discharging and suction of liquids in industry, agriculture, irrigation, water supply.

### Characteristics :

Smooth inside, transparent wall  
Food quality according to EU regulations.  
Good flexibility.  
Ianesco certificate on demand

### Special constructions :

Monoflex SAF : cold resistant version  
Flexant : antistatic version with copper wire

## TECHNICAL DATA

diameter in	diameter out	weight	bending radius	working pressure	maximum vacuum	length
mm	mm	kg/m	mm	bar	bar	m
16	25	0,180	64	7	0,76	25
20	26	0,210	80	7	0,76	25
22	28	0,250	88	7	0,76	25
25	31	0,300	100	7	0,76	25
30	36	0,370	120	6	0,76	25
32	38	0,380	128	6	0,76	25
35	42	0,460	140	6	0,76	25
38	45	0,530	152	6	0,76	25
40	47	0,560	160	6	0,76	25
45	53	0,680	180	5	0,76	25
50	58	0,760	200	5	0,76	25
55	63	0,900	220	5	0,76	25
60	69	1,020	240	5	0,76	25
63	72	1,095	252	5	0,76	25
70	79	1,260	280	4	0,76	25
75	85	1,385	300	4	0,76	25
80	90	1,560	320	4	0,76	25
90	101	1,820	360	4	0,76	25
100	112	2,230	400	3	0,70	25
105	117	2,230	420	3	0,65	25
110	122	2,520	440	3	0,65	25
120	133	2,880	480	3	0,60	25
150	163	4,000	600	2	0,60	25

Further diameters available upon request.

Technical data are based on +20°C.

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.  
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com