




GERFLAIR - 4 PVC M VACUFLEX®

Medium weight and very flexible ducting
Spring steel wire, PVC coated

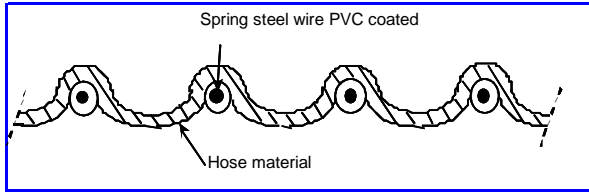

TECHNICAL DATA

Material :
Soft PVC flame retardant according to UL 94V0
Material thickness : 0,6 up to 1 mm
Spring steel wire, PVC coated

Colour :
Grey

Temperature resistance :
- 10°C / + 65°C

Applications :
Ventilation, suction of dust in woodworking industry, suction of fumes and gases.

Properties :
Flame retardant, flexible, solid construction, steel spiral to be grounded.

Diameter	Weight	Mat. Thickness	Bend. Radius	Max. Work. Pressure	Max. Vacuum	Single Length
mm	kg/m	mm	mm	bar	bar	m
25	0,200	0,6	18	1,70	0,48	20
30	0,220	0,65	21	1,60	0,40	20
32	0,240	0,65	22	1,60	0,35	20
35	0,260	0,65	24	1,60	0,35	20
40	0,300	0,65	28	1,50	0,30	20
45	0,340	0,65	33	1,40	0,30	20
50	0,560	1	35	1,30	0,29	20
55	0,620	1	39	1,20	0,25	20
60	0,670	1	42	1,20	0,25	20
65	0,720	1	46	1,00	0,23	20
70	0,760	1	49	1,00	0,23	10
75	0,820	1	53	0,90	0,22	10
80	0,870	1	56	0,80	0,21	10
90	0,980	1	62	0,70	0,18	10
100	1,100	1	70	0,60	0,16	10
110	1,540	1	74	0,60	0,15	10
120	1,680	1	82	0,50	0,14	10
125	1,750	1	88	0,50	0,13	10
130	1,820	1	92	0,40	0,12	10
140	1,960	1	97	0,30	0,11	10
150	2,100	1	105	0,25	0,10	10
160	2,240	1	117	0,25	0,10	10
170	2,380	1	123	0,25	0,10	10
180	2,520	1	130	0,25	0,10	10
200	2,800	1	140	0,20	0,10	10
250	3,900	1	175	0,12	0,07	10
300	4,680	1	210	0,08	0,05	10
400	6,300	1	280	0,07	0,04	5
500	7,800	1	350	0,06	0,03	5

Further diameters available upon request.
Technical data are based on +20°C.

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com