




GERFLAIR - 7 CLIP HT 1100°

Very flexible ducting for temperature up to 1100°C
External galvanized steel helix

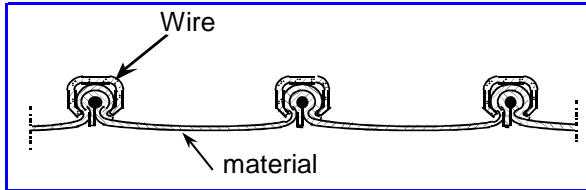

TECHNICAL DATA

Material :

3 ply
Inside: High temperature stainless steel fabric
Middle: High temperature isolation fabric
Outside: PU coated high temperature fabric
External galvanized steel helix

Colour :

Silver grey

Temperature resistance :

- 20°C / + 1100°C

Applications :

Suction of exhaust gases, flue gas extraction
and suction of other hot fumes, gases or
dust in all fields of industry.

Properties :

Good temperature resistance, outer wear
strip, flame retardant, excellent
compressibility

Special constructions :

7 CLIP HT 450°C
7 CLIP HT 650°C

Diameter	Weight	Mat. Thickness	Bend. Radius	Max. Work. Pressure	Max. Vacuum	Single Length
mm	kg/m	mm	mm	bar	bar	m
50	0,800	4	-	0,90	0,360	10
60	0,900	4	36	0,78	0,260	10
70	1,000	4	42	0,67	0,190	10
75	1,100	4	45	0,62	0,160	10
80	1,200	4	48	0,61	0,150	10
90	1,200	4	54	0,56	0,120	10
102	1,200	4	60	0,51	0,100	10
110	1,300	4	66	0,48	0,080	10
120	1,300	4	72	0,36	0,060	10
127	1,500	4	75	0,33	0,060	10
152	1,700	4	90	0,22	0,040	10
160	1,700	4	96	0,21	0,040	10
180	2,000	4	108	0,17	0,030	10
203	2,200	4	120	0,15	0,024	10
250	3,000	4	175	0,10	0,016	10
300	3,900	4	210	0,07	0,011	10
350	4,000	4	245	0,06	0,008	10
400	5,800	4	280	0,05	0,006	10
500	7,600	4	400	0,04	0,004	10
600	9,600	4	480	0,04	0,003	10
700	11,100	4	560	0,03	0,002	10
800	12,800	4	640	0,022	0,002	10
900	14,500	4	720	0,016	0,001	10
1000	15,500	4	800	0,010	0,001	10

Further diameters available upon request.

Technical data are based on +20°C.

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
We recommend our users to test the products before installation of any specific GAP hose.

Update : 23/02/2011 version 2011



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com