



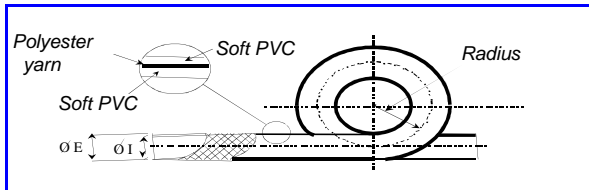

# GERTRESS - GERTRESS AL

## Soft PVC with Polyester yarn reinforcement Hose



## TECHNICAL DATA

**Material :**

Soft PVC wall food grade according to EU regulations  
Polyester yarn reinforcement

**Color :**

Translucent

**Temperature :**

-15°C / + 60°C

**Applications :**

Industry, compressed air

**Characteristics :**

Smooth bore

**Special constructions :**

GERTRESS 40bars  
GERTRESS AL SPH : without phthalate

diameter in	diameter out	weight	bending radius	maximum pressure	length
mm	mm	kg/m	mm	bar	m
4	10	0,076	12	15	25 - 50
6	12	0,100	18	15	25 - 50
8	13	0,125	28	15	25 - 50
10	16	0,145	38	15	25 - 50
12	18	0,215	45	15	25 - 50
15	21	0,305	60	15	25 - 50
19	26	0,350	80	15	25 - 50
25	33	0,505	112	12	25 - 50
30	38	0,740	138	12	25 - 50
32	42	0,705	160	12	25 - 50
40	50	0,815	210	12	25 - 50
50	60	1,485	300	9	25

Further diameters available upon request.

Technical data are based on +20°C.

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.  
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com