




GERFLAIR - 3 PVC S

Medium weight and flexible PVC ducting
Rigid PVC Helix

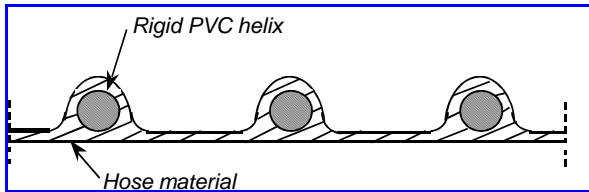

TECHNICAL DATA

Material :
Soft PVC
Material thickness : 0.7 up to 1.5 mm
Rigid PVC helix

Colour :
Grey

Temperature resistance :
0°C / + 60°C

Applications :
Suction of air, fumes and dust, cable protection, pulverization in agriculture, discharging of liquids without pressure.

Properties :
Smooth bore, solid construction.

Special constructions :
SERIE 3 PVC L : light weight ducting

Diameter	Weight	Mat. Thickness	Bend. Radius	Max. Work. Pressure	Max. Vacuum	Single Length
mm	kg/m	mm	mm	bar	bar	m
16	0,135	0,70	24	1,50	0,60	25
18	0,150	0,70	27	1,50	0,60	25
20	0,170	0,70	30	1,50	0,60	25
25	0,190	0,70	37,5	1,50	0,60	25
30	0,230	0,70	45	1,40	0,55	25
32	0,250	0,80	48	1,40	0,50	25
35	0,280	0,80	53	1,30	0,50	25
38	0,290	0,80	57	1,30	0,50	25
40	0,310	0,90	60	1,30	0,50	25
45	0,370	0,90	67,5	1,30	0,50	25
50	0,450	0,90	75	1,30	0,50	25
55	0,490	0,90	82,5	1,20	0,45	25
60	0,520	0,90	90	1,20	0,45	25
63	0,560	0,90	94,5	1,10	0,45	25
70	0,610	1,00	105	1,10	0,45	25
75	0,670	1,00	112,5	1,10	0,40	25
80	0,780	1,00	120	1,00	0,40	25
90	0,870	1,00	135	1,00	0,40	25
100	0,970	1,00	150	1,00	0,40	25
110	1,100	1,00	165	0,90	0,40	10
120	1,250	1,00	180	0,70	0,35	10
125	1,270	1,00	187,5	0,70	0,35	10
140	1,500	1,10	210	0,50	0,35	10
150	1,650	1,10	225	0,50	0,35	10
160	1,900	1,20	240	0,50	0,35	10
180	2,350	1,20	270	0,40	0,30	10
200	2,620	1,30	300	0,30	0,30	10
250	3,700	1,50	375	0,30	0,30	10
300	4,000	1,50	400	0,30	0,30	10

Further diameters available upon request.
Technical data are based on +20°C.

Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012