




GERFLAIR - 2 VSM AS 7418

Flexible EVA ducting

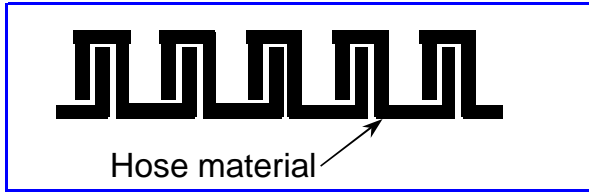

TECHNICAL DATA

Material :

EVA antistatic
 Surface resistance according to
 DIN 53482 10^{10} ohms

Colour :

Black

Temperature resistance :

- 50°/ + 60°C

Applications :

Industrial vacuum cleaners, textile machines,
 woodworking machines, granulate conveyors,
 engineering.

Properties :

Smooth bore, excellent flexibility, crush
 recoverable, good resilience.
 Surface resistance according to
 DIN 53482 10^{10} ohms

Special constructions :

2 VSM EL 7440 conductive

Diameter	Weight	Bend. Radius	Max. Work. Pressure	Max. Vacuum	Single Length
mm	kg/m	mm	bar	bar	m
27	0,258	60	0,60	0,60	25
32	0,320	70	0,50	0,50	25
35	0,360	75	0,50	0,50	25
38	0,380	80	0,40	0,40	25
40	0,420	90	0,40	0,40	25
45	0,460	100	0,30	0,30	25
48	0,490	110	0,28	0,28	25
50	0,510	120	0,25	0,25	25
60	0,620	140	0,20	0,20	25
63	0,660	150	0,18	0,18	25
70	0,730	165	0,17	0,17	25
75	0,750	180	0,16	0,16	25
80	0,810	200	0,15	0,15	25

Further diameters available upon request.

Technical data are based on +20°C.

COUPLINGS SCREWABLE



Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
 We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com