




GERFLAIR - 2 VSM EL 7440

Flexible EVA ducting

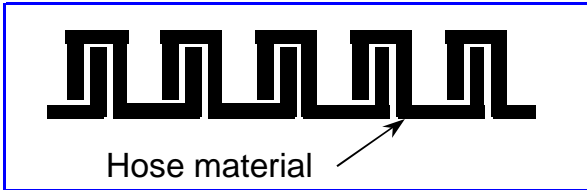

TECHNICAL DATA

Material :

EVA conductive
 Surface resistance according to
 DIN 53482 10^6 ohms

Colour :

Black

Temperature resistance :

- 50°/ + 60°C

Applications :

Industrial vacuum cleaners, textile machines,
 woodworking machines, granulate conveyors,
 engineering.

Properties :

Smooth bore, excellent flexibility, crush
 recoverable, good resilience.
 Surface resistance according to
 DIN 53482 10^6 ohms

Special constructions :

2 VSM A 7418 antistatic

Diameter	Weight	Bend. Radius	Max. Work. Pressure	Max. Vacuum	Single Length
mm	kg/m	mm	bar	bar	m
27	0,280	60	0,60	0,60	25
32	0,320	70	0,50	0,50	25
38	0,380	80	0,40	0,40	25
50	0,510	120	0,25	0,25	25

Further diameters available upon request.

Technical data are based on +20°C.

COUPLINGS SCREWABLE



Technical data contained in this document is an average of test results and do not implicate any guarantee of our part.
 We recommend our users to test the products before installation of any specific GAP hose.

Update : 08/12/2011 version 2012



GAP PLASTOMERE - ZI Sud - Chemin de Fortuneau - BP 324 - F26208 MONTELIMAR CEDEX - France

Tel: +33 4 75 01 75 75 - Fax: +33 4 75 52 02 27 - www.gap-plastomere.com - info@gap-plastomere.com